


Elec-Trak Blade Installation Guide

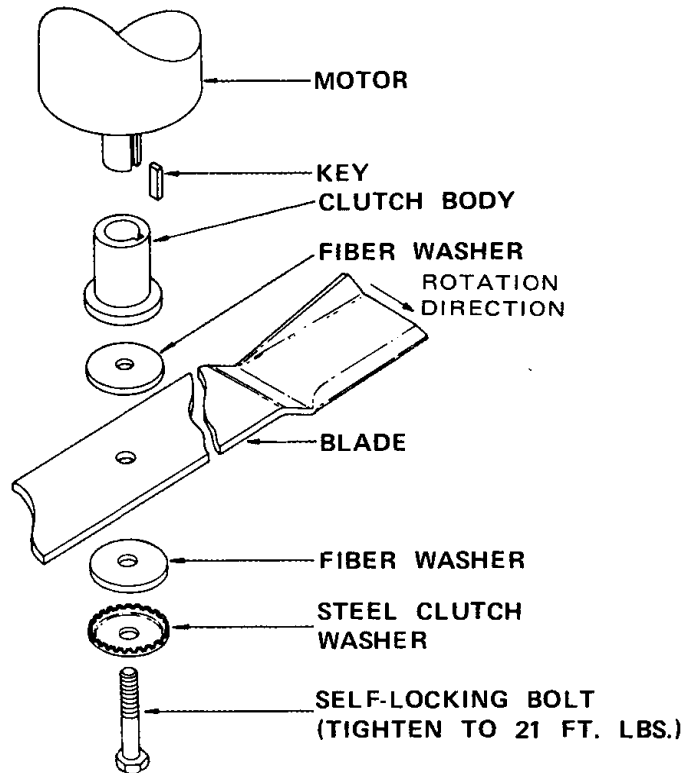

If reusing an existing key, ensure that edges are square and sides are flat. Replace if needed.

Apply a liberal coat of anti-seize compound to the outside of the motor shaft and inside of the clutch body to facilitate future removal. Do not apply to screw threads.

Self-locking bolt should be Grade 5 or better, with a Nylon patch visible on the threads (this provides the self locking mechanism). Replace if needed.

Do not over tighten bolt – the blade should be able to slip if it strikes an obstacle while mowing.